www.coolightled.com



CLT-INJF24048T09-0A48



SHENZHEN Coolight Opt-Ele Co., Ltd 4/F, Bldg. C, Chuangfu Science & Technology Park, Beihuan Rd., Shiyan Town, Shenzhen, China, 518108 Tel: +86-755-8452 8176 Fax: +86-755-8452 8173 E-mail: sales@coolightled.com www.coolightled.com www.coolightledlight.com

COOLiGHT™

Lighting your life

Features

- * Apply single color 2835SMD LED
- * Wide beam angle, 120degree
- * 3M self-adhesive tape on the back
- * Can be cut every 6LEDs along the cut-mark
- * This LED strip is dimmable, you can use a dimmer based on PWM technology to dim it.

Applications


- * Architectural decorative lighting
- * Signage letters back-lighting
- * Arch edge lighting
- * Home or Club mood lighting
- * Staircase accent lighting
- * Car decoration



SHENZHEN Coolight Opt-Ele Co., Ltd 4/F, Bldg. C, Chuangfu Science & Technology Park, Beihuan Rd., Shiyan Town, Shenzhen, China, 518108 Tel: +86-755-8452 8176 Fax: +86-755-8452 8173 E-mail: <u>sales@coolightled.com</u> <u>www.coolightled.com</u> <u>www.coolightled.com</u>

COOLIGHTTM Lighting your life

• Dimensions

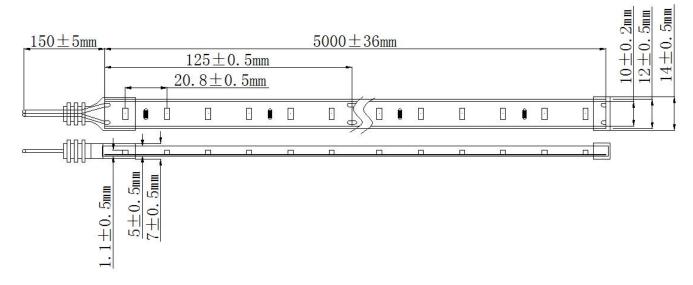

• Quick reference

Product	Color	IP	CRI	led/m	W/m	Lm/m	Lm/w	Shippin g Units
CLT-INJF2404 8T09-0A48	3000K	67	80	48	7.2	650	90	1/5


SHENZHEN Coolight Opt-Ele Co., Ltd

4/F, Bldg. C, Chuangfu Science & Technology Park, Beihuan Rd., Shiyan Town, Shenzhen, China, 518108 Tel: +86-755-8452 8176 Fax: +86-755-8452 8173 E-mail: sales@coolightled.com www.coolightled.com www.coolightledlight.com


• Light Distribution Curve(cd)

COOLight™

Lighting your life

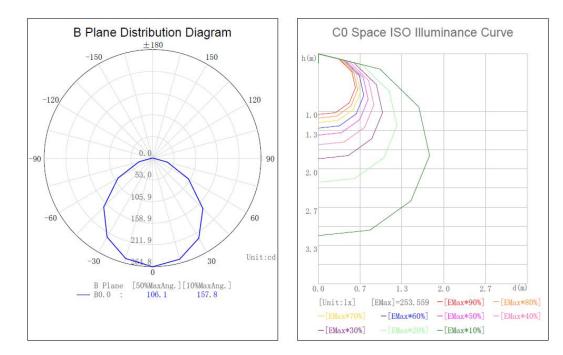

Lux test diagram

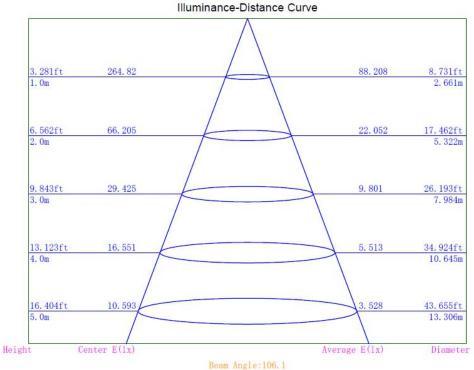

SHENZHEN Coolight Opt-Ele Co., Ltd. 4/F, Bldg. C, Chuangfu Science & Technology Park, Beihuan Rd., Shiyan Town, Shenzhen, China, 518108 Tel: +86-755-8452 8176 Fax: +86-755-8452 8173 E-mail: sales@coolightled.com www.coolightled.com www.coolightledlight.com

• Standard package:

COOLIGHT

Lighting your life



• Package information:

Anti-Static bags	Anti-Static bags/	inner box/outer	Outer carton	NT. ±5%	GW. ±5%
size(mm)	inner box(PCS)	carton(PCS)	size(mm)	(Kg)	(Kg)
240x230	16	2	560x410x305	13	14.5

• Cautions 🥂

* Installation of LED modules (with power supplies) needs to be made with regard to all applicable and safety standards. Only qualified personnel should be allowed to perform installations.

* Assembly must not damage or destroy conducting paths on the circuit board.

* Observe correct polarity!

* Please ensure that the power supply is of adequate power to operate the total load.

* When mounting on metallic or otherwise conductive surfaces, there needs to be an electrical isolation at soldering points between module and the mounting surface.

* The maximum run length from any power feed should be limited to 5000 mm.

* Soldering of wires with the module mounted on a heatsink:Pretin solderpads and wires and solder for max 3 s at 350 °C. Allow solderpoints to completely cool down before the next soldering.Prevent shear- or peel forces.

* The mounting of the module is facilitated by means of the double-sided adhesive on the back-surface of the module. Care must be taken

to provide a clean and dry mounting surface, free of oils or silicone coatings as well as dirt particle. The mounting substrate must have

sufficient structural integrity. Take care to completely remove the protective film. Once the module is appropriately positioned, press on the

module with about 20N/cm² (refer to application techniques of 3M adhesive transfer tapes).

* The minimum bending radius is 20 mm.

* When installing in environments with large variations in temperature and operating length of more than 2 m, the use of metallic mounting surfaces is necessary. Otherwise it is advisable to use an additional thicker adhesive tape to absorb the stress of any mismatch in expansion coefficients.