

2835 LED Strip, 7.2W 24V 48LED/M 15LED/FEET DC24V




- 7.2W/m/2.2W/ft
- CRI>90
- 10MM Width



LM 80 compliant



Dimensions:

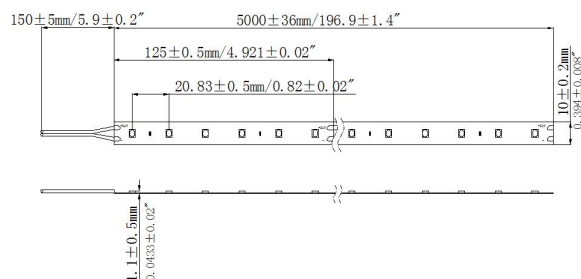

Electrical data:

Number Led/M(ft)	48/15
Voltage (V)	24
SDCM	5step
Power W/m(W/ft)	7.2/2.2
PCB Width (mm/inch)	10/0.393
PCB thickness(mm/inch)	0.3/0.012
CRI/R9	90/-
Max length (m/ft)(10% voltage drop)	5/16.4
Cut Size mm/x led/(inch /x led)	125mm/6leds/4.92/6leds

Part No.CLT/CLX	CCT(K)	LM/W±10%	LM/M±10% (ft)
CLT/CLX-INNF24048T09-0A49	3000	75	540/165
CLT/CLX-DNNF24048T09-0A49	4000	80	576/175

Cautions: 1.The given data are typical value,Due to tolerances of the production process and electrical components,values for light output and electrical power can be ±10%

2.Up to 14.4W/M(4.39W/feet)no need for additional heat sinking on Alu profile,if more than 14.4W/M(4.39W/feet) must be used the heat sinking.