


NEW



Color: Grey Anodized Alluminium

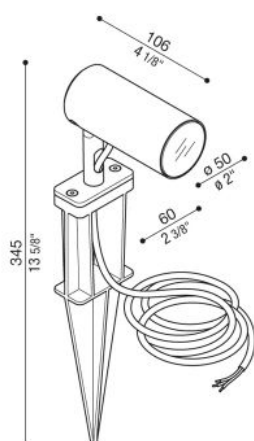

### Available colours:

|                           |                                                                                     |
|---------------------------|-------------------------------------------------------------------------------------|
| Grey Anodized Alluminium  |  |
| Black Anodized Alluminium |  |
| Green Anodized Alluminium |  |
| Brown Anodized Alluminium |  |

### Technical information:

|                                    |                                                                                                 |
|------------------------------------|-------------------------------------------------------------------------------------------------|
| Type of product:                   | Ground recess                                                                                   |
| Diffuser type:                     | Serigraphed glass                                                                               |
| Lamp type:                         | LED                                                                                             |
| Energy performance class:          | A++                                                                                             |
| Colour temperature:                | <div>N</div> 4000K<br><div>3</div> 3000K, lm -5%<br><div>2</div> 2700K, lm -5%                  |
| Optics:                            | <div>D</div> Diff.<br><div>S</div> 25°<br><div>M</div> 40°<br><div>L</div> 65°                  |
| CRI:                               | >80                                                                                             |
| LB Factor:                         | L80B50                                                                                          |
| Photobiological risk:              | RG0                                                                                             |
| Watt:                              | 10                                                                                              |
| Lumen:                             | 1100                                                                                            |
| Real Lumen:                        | 933                                                                                             |
| Power supply:                      |  220-240 V |
| Insulation class:                  |  CL.I      |
| Type of protection:                | IP 66                                                                                           |
| Resistance to breakage:            | IK 07 2J xx5                                                                                    |
| Standards and Marks of Conformity: | CE                                                                                              |
| Pieces per package:                | 4                                                                                               |

Suitable for ground installation.


### Product description:

Suitable for ground installation and for outdoor use. Body made of EN-6026 anodized aluminum; highly resistant to oxidation due to anodizing treatment. Heat tempered and silk-screen printed glass. Inaccessible device, provided with 1 m prewired power cable HORN-F with epoxy resin treatment. A4 or AISI 316L stainless steel nuts and bolts. Available LED AC direct, phase cut dimmable. Available 24V version. **LED 4000K (N), 3000K (3) or 2700K (2). No risk of photobiological damage, RG0 group (EN62471).**

# Ago Garden Power

LL126100  

LOMBARDO

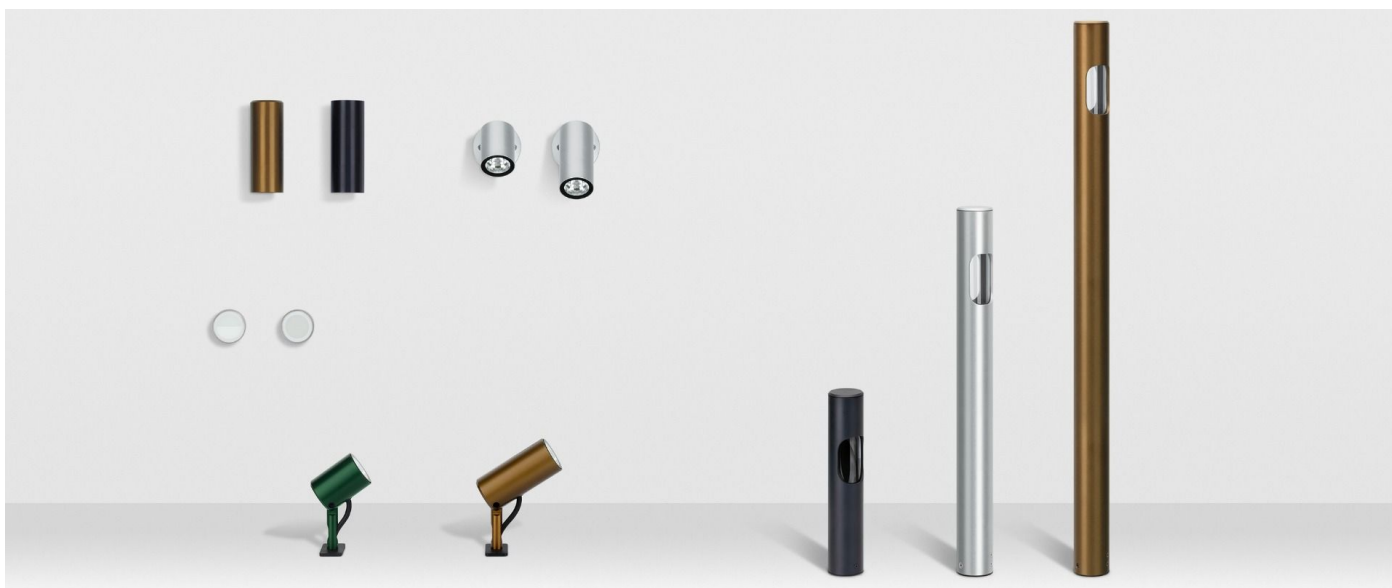

**Lombardo S.r.l.**

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **F** 0039 035 939 496 - **E** [info@lombardo.it](mailto:info@lombardo.it)

**[lombardo.it](http://lombardo.it)**