

RefLED Superia Retro MR16

RefLED Superia Retro MR16 V2 345LM 865 36° SL

0029229



Product features

- Compact, energy efficient and exceptional value for money product
- Same shape and size as halogen MR16 lamp
- Compact Cluster SMD technology enabling high efficiency with halogen look
- Reduced visible heat sink from the front
- Available in 36 degree
- High lumen efficacy
- 12V AC/DC
- 25,000 hours average rated life
- 3 years warranty



PRODUCT OVERVIEW

Product name	RefLED Superia Retro MR16 V2 345LM 865 36° SL
Technology	LED
Watt (Rated) (W)	4.3
Type	LED exchangeable
Cap/Base	GU5.3
Fixture rating	Open
General application	Hospitality, Education, Residential & Consumer
ETIM Class	EC001959
E-number FI	4741109
Warranty	3 years
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	6
Beam Angle (°)	36
Photobiological Risk Group	RG1
Wattage (W)	4.3
Product Voltage (V)	12
Dimmable	No
Average life (Nominal) (h)	25000
Product EAN number	5410288292298

DATA TABLE

General data

Product name	RefLED Superia Retro MR16 V2 345LM 865 36° SL
Technology	LED
Watt (Rated) (W)	4.3
Type	LED exchangeable
Cap/Base	GU5.3
Fixture rating	Open

RefLED Superia Retro MR16

RefLED Superia Retro MR16 V2 345LM 865 36° SL

0029229

General application	Hospitality, Education, Residential & Consumer
Operating temperature range (°C)	-20°C - 40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4741109
Warranty	3 years

Optical data

Rated Luminous Flux Useful (lm)	380
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	6
Rated Luminous Intensity (cd)	600
Beam Angle (°)	36
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

Electrical data

Wattage (W)	4.3
Equivalent watt (W)	35
Product Voltage (V)	12
Control gear required	No
No. Of switching cycles before premature failures	>50000
Transformer required	Yes
Dimmable	No
Lamp Energy Label (class)	F
Nominal Frequency (Hz)	DC/50/60/HF

Lifetime data

Lifespan L70 B50	25000
Average life (Nominal) (h)	25000
Average life (Rated) (h)	25000

Physical data

Nominal Product Length (mm)	44
Nominal Product Diameter (mm)	50
Weight (kg)	0.035

Packaging

Single packaging type	Carton
Product EAN number	5410288292298
Packaging single length / height (cm)	8.2
Packaging single width (cm)	6.1
Packaging single depth (cm)	5.1
DUN14 (inner)	25410288292292

RefLED Superia Retro MR16

RefLED Superia Retro MR16 V2 345LM 865 36° SL


0029229

Units per inner package	6
Packaging inner length / height (cm)	9.5
Packaging inner width (cm)	17.0
Packaging inner depth (cm)	13.5
DUN14 (outer)	15410288292295
Units per outer package	36
Packaging outer length / height (cm)	20.0
Packaging outer width (cm)	41.5
Packaging outer depth (cm)	18.0


Safety data

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

PHOTOMETRY

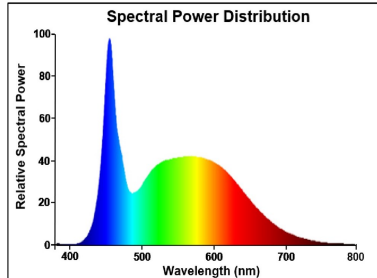

TECHNICAL DRAWINGS



RefLED Superia Retro MR16


RefLED Superia Retro MR16 V2 345LM 865 36° SL

0029229



SYLVANIA

0029229

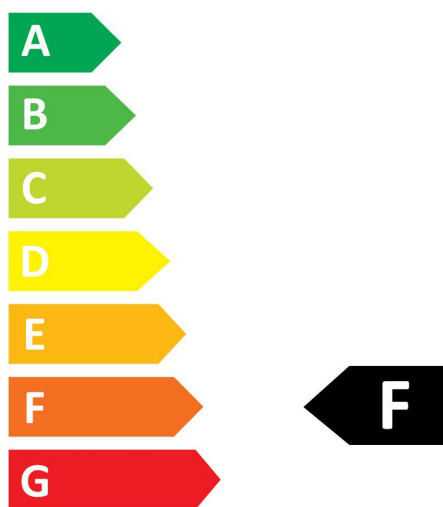

5
kWh/1000h



2019/2015

RefLED Superia Retro MR16


RefLED Superia Retro MR16 V2 345LM 865 36° SL

0029229



SYLVANIA

0029229

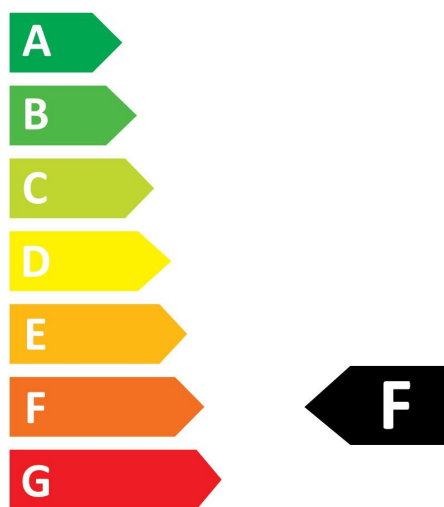

5
kWh/1000h



2019/2015