


DIMENSIONS (mm):

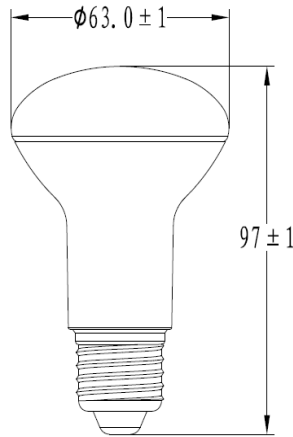

Bulb type : R63
Cap type : E27

Finish : White
Light Colour : 830 Warm White

<u>ELECTRICAL DATA:</u>		RATED	MIN.	MAX.
Lamp Wattage	(W) :	7.0	-	7.7
Lamp Voltage	(V) :	230	202	254
Lamp Current	(mA) :	56		
Power Factor	(λ) :	0.5		
Supply Frequency	(Hz) :	50 / 60		
Energy Consumption per 1000h	(kW/h) :	7.0		

<u>PHOTOMETRIC DATA:</u>				
Beam Angle	(°) :	120	90	150
Luminous Intensity	(cd) :	187	140	234
Total Luminous Flux	(lm) :	630	567	-
Total Luminous Efficacy	(lm/W) :	90		
Correlated Colour Temperature	(K) :	3000		
Colour Rendering Index	(Ra) :	80	77	-
Red Colour Rendition	(R9) :	5		
Chromaticity Co-ordinates	(x,y) :	CCx=0.437 CCy=0.404	6-step MacAdam Ellipse	

<u>OPERATING CONDITIONS:</u>				
Ta Ambient temperature range	(°C) :	25	-10	45
Tp Point	(°C) :	75	-	-
Starting Time	(s) :	-	-	0.5
Warm-up time to >95% Flux	(s) :	-	-	2.0
Burning position	:	Universal		
Control Gear	:	Integrated Electronic		

<u>LAMP LIFE:</u>			
Average Life (L ₇₀ F ₅₀)	(h) :	15,000	
Switching Cycles	(#) :	15,000	



APPLICATION: Suitable for general indoor lighting, Not suitable use in totally enclosed luminaires.
Not suitable for use with dimmer switches / electronic timers / PIR detectors.
Complies with IEC62560, IEC62612, IEC62471, IEC61547, IEC61000, EN55015, EN62493.

Issued by : GUANGZHOU
Date : 6-IX-2016
Revision date :




DATA SHEET

Spec No. : AEC_L-LED-R63-0026332
Supersedes :
Page : 1 of 2

PHOTOMETRIC GRAPHICS:

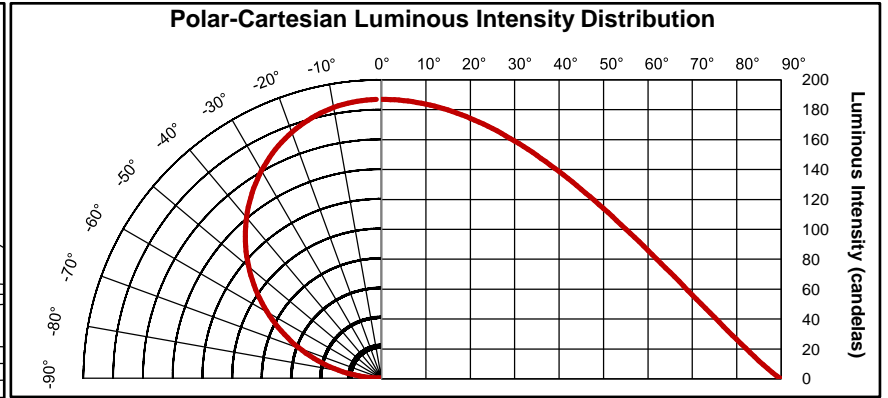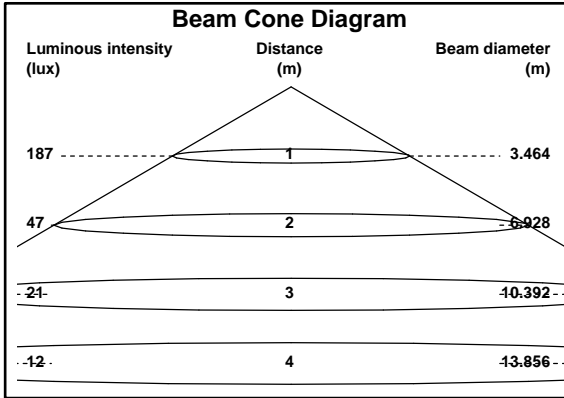

SPECTRAL GRAPHICS:

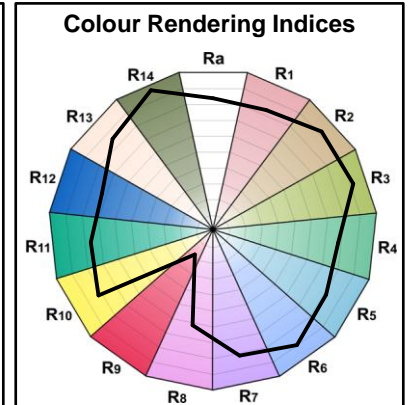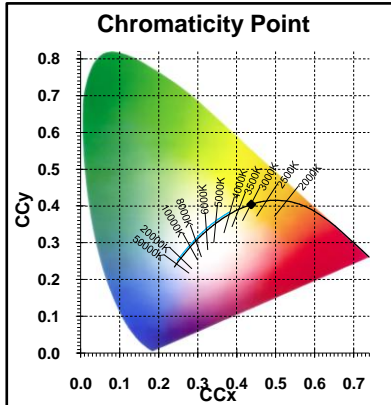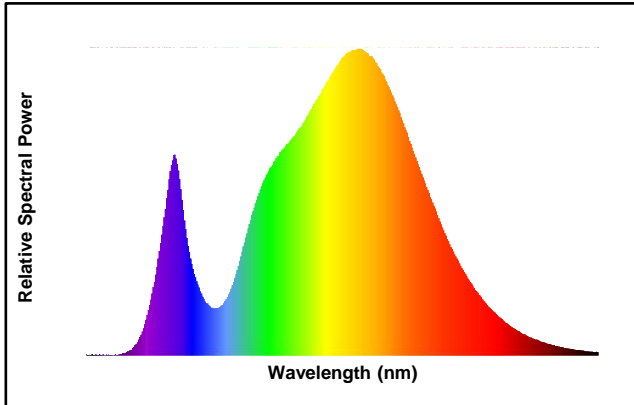

Issued by : GUANGZHOU
Date : 6-IX-2016
Revision date :

DATA SHEET

Spec No. : AEC_L-LED-R63-0026332
Supersedes :
Page : 2 of 2